


BHVE 40~135




BHVE 80 - 60 AR - 1HP
1 2 3 4 5

1. (Type)
2. (Size)
3. (Ratio)
4. (S. L.)
5. (Power)

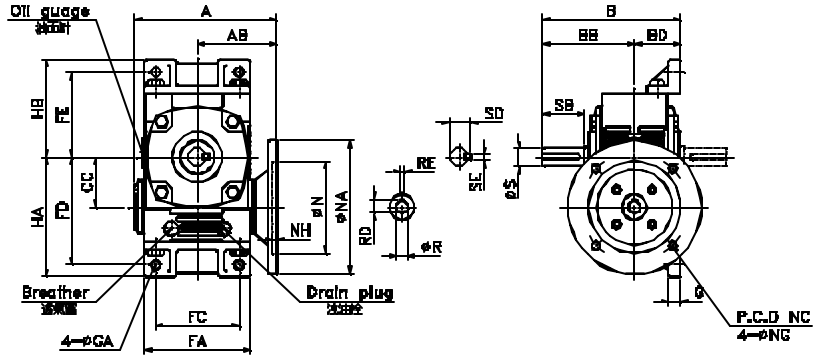

S.L. (Shaft Location)

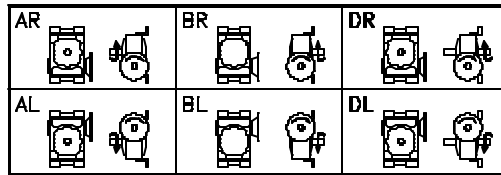


BHVEO 50~135




BHVEO 80 - 60 R - 1HP
1 2 3 4 5

1. (Type)
2. (Size)
3. (Ratio)
4. (S. L.)
5. (Power)

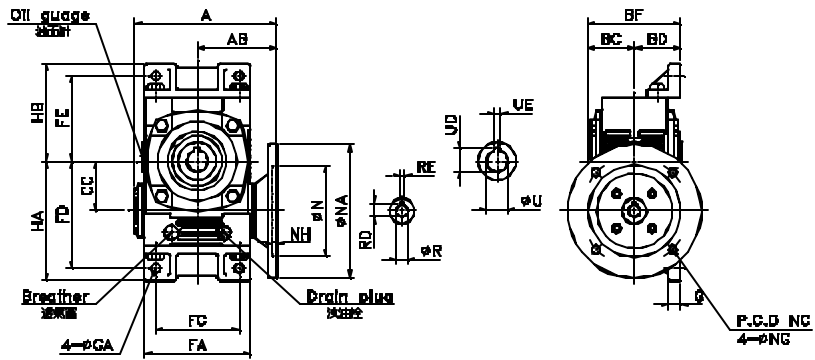

S.L. (Shaft Location)



Dim. table

Size	Ratio	A	AB	B	BB	BC	BD	BF	CC	FA	FC	FD	FE	G	GA	HA	HB	(¹) (kg)	
40	1:10	150	89	131	84	45	47	92	40	104	80	96	75	10	10	108	87	0.18	5.7
50	1:15	163	85	145	95	49.5	50	99.5	50	115	90	110	90	14	11	123	102	0.31	6.8
60	1:20	177	90	165	110	56	55	111	60	125	100	129	102	15	11	144	116	0.44	8.4
70	1:30	211	117	195	130	65.5	65	130.5	70	155	120	155	120	18	15	170	135	0.70	15
80	1:40	233	129	212	140	72	72	144	80	174	140	180	132	18	15	195	147	0.99	21
100	1:50	286	160	260	170	87.5	90	177.5	100	224	190	215	155	20	15	233	172	1.87	41
120	1:60	349	180	290	190	100	100	200	120	264	220	255	195	22	18	273	217	4.1	61
135		373	201	320	210	108	110	218	135	304	260	285	230	23	18	308	252	4.4	83

Size	Ratio	Input Bore			Input Adapter				Output Shaft				Output Hollow			Power	
		R	RD	RE	N _(H7)	NA	NC	NG	NH	S _(h8)	SB	SD	SE	U	UD		UE
40	1:10	11	12.8	4	110	160	130	10	5	15	35	17	5	20	23	6	0.25HP
50	1:15	11	12.8	4	110	160	130	10	5	17	40	19	5	25	28	7	0.25HP
60	1:20	11	12.8	4	110	160	130	10	5	22	50	25	7	25	28	7	0.25HP
	1:30	14	16.3	5	110	160	130	10	5	22	50	25	7	25	28	7	0.5HP
70	1:40	14	16.3	5	110	160	130	10	5	28	60	31	7	30	33	7	0.5HP
	1:50	19	21.8	6	130	200	165	12	5	28	60	31	7	30	33	7	1HP
80	1:60	19	21.8	6	130	200	165	12	5	32	65	35	10	35	38	10	1HP
		24	27.3	8	130	200	165	12	5	32	65	35	10	35	38	10	2HP
100		24	27.3	8	130	200	165	12	5	38	75	41	10	40	43	12	2HP
		28	31.3	8	180	250	215	15	5	38	75	41	10	40	43	12	3HP
120		28	31.3	8	180	250	215	15	5	45	85	48	12	45	48.5	14	3HP
		28	31.3	8	180	250	215	15	5	45	85	48	12	45	48.5	14	5HP
135		28	31.3	8	180	250	215	15	5	55	95	60	15	55	60	15	5HP
		38	41.3	10	230	300	265	15	5	55	95	60	15	55	60	15	7.5HP